

86" LED Interactive Flat Panel



Key Features



Multi-Touch

In-glass touch technology; 20 touch points



Full HD

4K-Anti-Glare, bright and crisp



Wake up function

Intelligent waking up function



Plug and Play

Switch it on and you are ready to Go!



Supporting

One-click system restore function



Sound Acquisition

Built-in microphone, 4 Arrays, with a pickup distance of 6M.



Specifications

Model	LTV-H8600C
TFT LCD	
Size	86"
Backlight type	LED
Display area	1913.0(H)mmx1084.0(V)mm
Resolution	4k, 3840x2160 at 60Hz
Luminance	350 cd/m ² (typ.)
Contrast ratio	1200:1 (typ.)
Response time	8ms (typ.)
Visual angle	≥178 °
Color Support	1.07 Billion colors

Touch Parameters	
Touch frame	4mm Anti-glare tempered glass
Touch technology	Capacitive In-Glass Touch
Touch points	20 point
Response time	5ms
Interface drive	USB, plug and play
Writing method	Finger or capacitive pen
Light resistance	80K Lux
System support	Android/Win7/Win8/Win10

Android System Configuration	
Android version	Android 11.0
Body memory	16G ROM
Run memory	2G RAM
Extended storage	N/A
Compatible video format	MKV, MPE4, AVI, FLV, WMV, ASF
Front buttons	Return, Volume-, Volume +, Settings, Home, POWER, Restore
Front interface	HDMI*1, Public USB*1, Touch USB*1
Rear interface	USB*2, RS232*1, RJ45*1, Coaxial*1, HDMI*2, Touch USB *1, VGA IN*1, VGA-AUDIO *1, AV IN *1, EARPHONE*1, YPBPR IN*1, RF*1, AV OUT*1, HDMI OUT*1
Loudspeaker	15W x 2
Wifi	2.4G + 5G Built-in

Power Supply Parameters	
Power supply	220V~50/60Hz
Power dissipation	≤450W
Standby power consumption	≤0.5W
AC switch	With AC switch
Power interface	With AC character seat

Accessories	
Accessories	Quick User Guide, quality certificate / warranty card, Remote controller x 1, Capacitor touch pen x 2, power cable x 1, 2m



Specifications

Model	LTV-H8600C
Environment parameter	
Storage temperature	Storage temperature -20 to + 60°C
Storage humidity	10%RH ~ 90%RH
Working temperature	Use a temperature of 0 to + 50°C
Working humidity	10%RH ~ 90%RH
Life span	≥30000 hour
Wireless encryption protocol	WPA2-PSK
Wireless connection mode	Insert the button to automatically connect, run automatically, and click one-key to share. No need to install software on a PC or occupy a computer Wi-Fi

Smart pen	
Working current	Approximate 4mA
Mode of data transmission	2.4GHz RF wireless technology
Frequency range	2402 ~ 2480MHz
Working distance	Effective range:15m



Size / Weight	
Overall size	1974.8 (L) x1200.00 (H) x 94.55 (W) mm
Overall size with the rack	1974.8 (L) x1200.00 (H) x 116.95 (W) mm
Packaging	Carton
Packing size	2115 (L) x1348 (H) x223 (W) mm
Net weight	85Kg
Gross weight	95Kg
Wall mounting rack (standard)	Composition:1521-XD217500-01 XD2175 Vertical bar 1521-XD217500-02 XD2175 Horizontal bar 1521-XD217500-03 screws



Featured Details

86" LED Interactive Flat Panel

Buttons, Interface & Corners

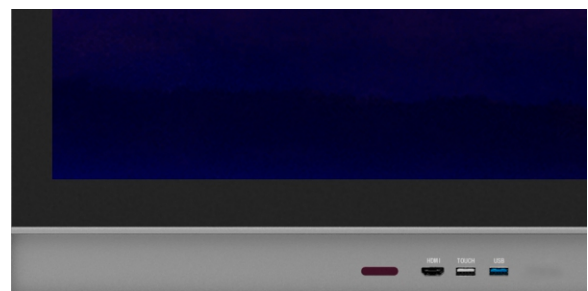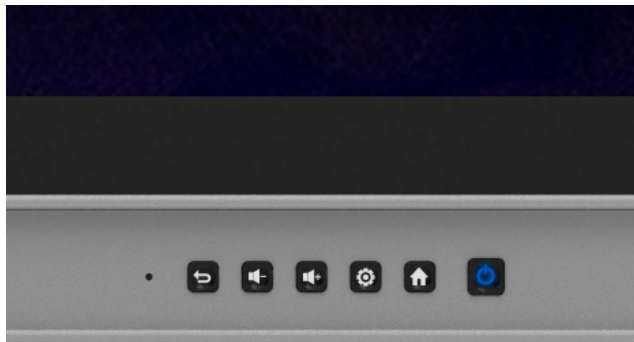

Back

